


2.5.2 KaMOS® Test equipment Type 200800

- for testing of KaMOS® gaskets (Testrange: 50 - 400 bar)

Pos.	Type	Description	
1	200800-01	Hydraulic Pump	10,000 PSI
2	200800-15	Protection frame	Aluminium, 700mm
3	200800-11	Manometers	0-400 bar
4	200800-04	Valve	400 bar
5	200500-05*	Quick release	Male coupling
6	200500-06*	Quick release	Female coupling
7	200500-07*	Test hose	630 bar, 2,5 m length

* Same as used with KaMOS® Test Equipment type 200500

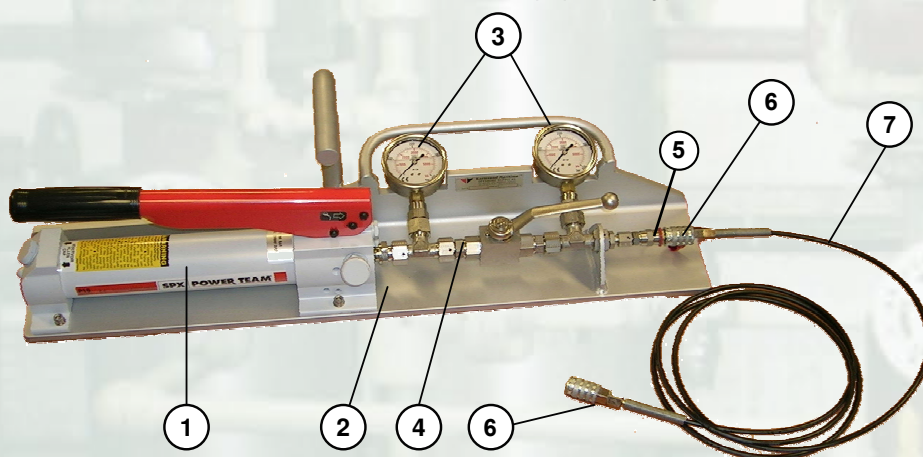

Test equipment includes KaMOS® Testplug 200100

2.5.3 KaMOS® Test plug/ Indicator/Blind Plug Cap

The KaMOS® Test plug is to be used for the pressure test when RTJ/ gaskets are installed and will be replaced by either indicator for future leakage surveillance or blind plug cap.



Test and surveillance units

Type	Description	
200100	KaMOS® Test plug	AISI303 body, Quick release male
200200	KaMOS® Indicator	AISI303
200300	KaMOS® Blind Plug Cap	AISI303